

LinkStar Kits | EcoStar

Linkable Site Floodlights Designed for Industrial Applications



Slim Design

Single light head with 2.2m tripod stand

Double light head with 2.2m tripod stand and T-Bar bracket

Choose Voltage:

110V or 240V



Choose:

Single or double light head

Choose Lumens:


3,600lm (30W)

6,000lm (50W)

12,000lm (100W)

- 110V or 240V AC 50/60Hz
- Linkable floodlights
- 120° beam angle
- Adjustable brackets
- Strong die-cast aluminium casing with stainless steel fitting
- Designed for industrial applications
- Toughened glass lens
- Light head can also be bought separately

110V LinkStar Example:

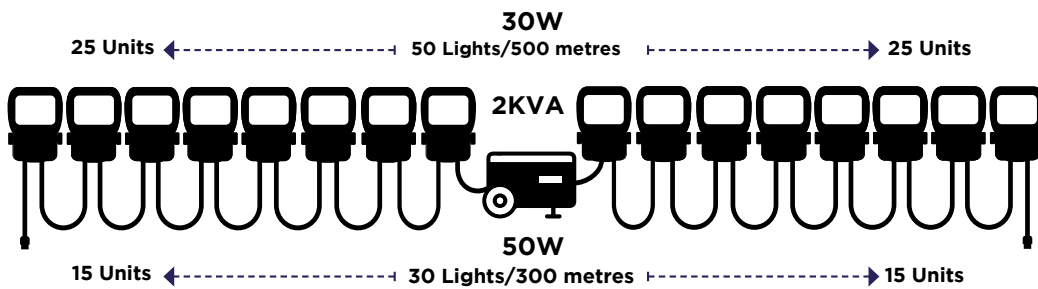

CAN BE POWERED BY GENZERO P32 BATTERY POWER GENERATORS

LinkStar Kits

3 Models available:

	LinkStar 30W	LinkStar 50W	LinkStar 100W
	1 head - 3,600lm 2 heads - 7,200lm	1 head - 6,000lm 2 heads - 12,000lm	1 head - 12,000lm 2 heads - 24,000lm
	110V or 240V		
MODE	High		
	IP65		
CODE	NSLINKSTAR30-KIT NSLINKSTAR30TWIN-KIT	NSLINKSTAR50-KIT NSLINKSTAR50TWIN-KIT	NSLINKSTAR100-KIT NSLINKSTAR100TWIN-KIT

LinkStar Light Heads

3 Models available:

	LinkStar 30W	LinkStar 50W	LinkStar 100W
	3,600lm	6,000lm	12,000lm
	110V		
MODE	High		
	IP65		
CODE	NSLINKSTAR30	NSLINKSTAR50	NSLINKSTAR100

Supplied with 2.2m swing legged tripod stand and T-Bar Bracket (Twin heads)

Optional Accessories:

14 Metre extension lead: SPCABLE14M

Scaffold Bracket: SPSCAFFOLDBRACKET



Scaffold bracket



Scan for multi-language information