

# LINKSTAR KITS

## 30w

1 HEAD 3,600 LUMENS	2 HEADS 7,200 LUMENS	110V	120° BEAM	IP65 RATED
---------------------------	----------------------------	------	--------------	---------------

CODE 1 HEAD: NSLINKSTAR30-KIT  
2 HEADS: NSLINKSTAR30TWIN-KIT  
HEAD ONLY: NSLINKSTAR30

## 50w

1 HEAD 6,000 LUMENS	2 HEADS 12,000 LUMENS	110V	120° BEAM	IP65 RATED
---------------------------	-----------------------------	------	--------------	---------------

CODE 1 HEAD: NSLINKSTAR50-KIT  
2 HEADS: NSLINKSTAR50TWIN-KIT  
HEAD ONLY: NSLINKSTAR50

## 100w

1 HEAD 6,000 LUMENS	2 HEADS 12,000 LUMENS	110V	120° BEAM	IP65 RATED
---------------------------	-----------------------------	------	--------------	---------------


CODE 1 HEAD: NSLINKSTAR100-KIT  
2 HEADS: NSLINKSTAR100TWIN-KIT  
HEAD ONLY: NSLINKSTAR100

Supplied with 2.2m swing legged tripod stand and T-Bar Bracket (Twin heads)

Other accessories:  
14 Metre extension lead: SPCABLE14M  
Scaffold Bracket: SPSLBRACKET



### 110V LinkStar Example:

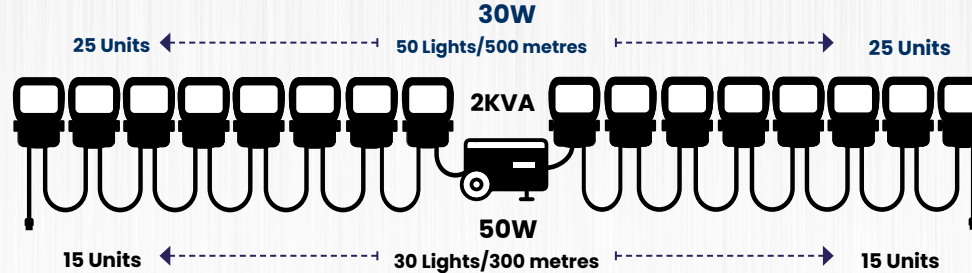

Optional scaffold bracket

## LINKABLE FLOODLIGHTS SYSTEM FOR INDUSTRIAL & SITE APPLICATIONS

Designed for scalable setups, LinkStar's linkable heads create seamless, high-efficiency lighting across entire work area. Ideal for evolving industrial and site demands.

- Linkable floodlights with adjustable brackets
- Strong die-cast aluminium casing with stainless steel fitting
- Designed for industrial applications
- Toughened glass lens and slim profile
- Light heads can be Purchased separately (see head only product code)



Scan to find out more